



Conergy PH 230P-250P

The Conergy PH 230P-250P solar modules offer a high level of module output at an attractive price/performance ratio. They are equipped with 60 efficient, polycrystalline cells and have proven their worth in practical applications over the years. They are characterised by high yields and a long service life. Their production is certified in accordance with the ISO 9001 international quality standard and meets the high quality standards of Conergy. Thanks to the superb quality of manufacture and standardised dimensions, the Conergy PH 230P-250P can be used for all applications.

Solar modules in the Conergy P-series are also available with monocrystalline and polycrystalline cells in other power classes and different module dimensions.



Benefits for the system operator

- | Attractive price/performance ratio
- | High module output
- | Certification in accordance with IEC/EN 61215 Ed. 2 and IEC/EN 61730
- | Positive performance tolerance of -0%/+3 %
- | Secure investment decision thanks to a 10-year product warranty


Benefits for the installer

- | Simple installation thanks to functional connection technology
- | Option to combine with Conergy inverters and mounting systems



CONERGY

Conergy PH 230P-250P

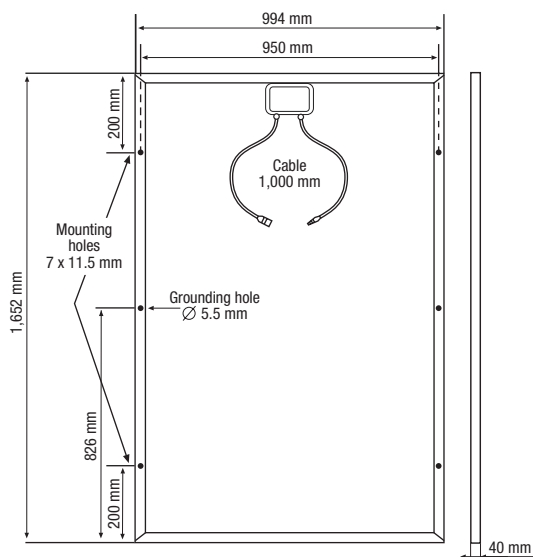

Module dimensions (L x W x H): ¹ 1,652 x 994 x 40 mm
 Cell dimensions: 156 x 156 mm
 Number of cells: 60
 Cell type: Polycrystalline
 NOCT: ² 43 ± 2 °C
 Maximum permissible load: 5,400 Pa ³
 Front cover type: Patterned solar glass
 Junction box: NingBo Chuang Yuan PV-CY802, protection class IP 65, 151 x 120 x 26 mm
 Cable: Xinhongye PV1-F, 2 x 1,000 mm length 4 mm² cross-section
 Plug type: PV-CY01L (MC4-comparable)
 Module weight: ⁴ 19.5 kg
 Certification: In accordance with IEC/EN 61215 Ed. 2 and IEC/EN 61730, ISO 9001:2008, ISO 14001: 2004, OHSAS 18001: 2007, MCS, UL 1703
 Product warranty: ⁵ 10 years
 Performance guarantee 1: ⁵ 10 years, 90 % of nominal output
 Performance guarantee 2: ⁵ 25 years, 80 % of nominal output
 Maximum permissible system voltage: 1,000V
 Reverse current loadability (IR): 20 A
 Frame material: Anodised aluminium

Conergy PH	230P	235P	240P	245P	250P
Electrical ratings under standard test conditions ⁶					
Nominal output (P _{nom})	230 W	235 W	240 W	245 W	250 W
Performance tolerance	-0%/+3 %	-0%/+3 %	-0%/+3 %	-0%/+3 %	-0%/+3 %
Module efficiency (P _{nom})	14.01 %	14.31 %	14.62 %	14.90 %	15,20%
MPP voltage (V _{mpp}) ⁷	28.78 V	29.16 V	29.54 V	29.92 V	30,30V
MPP current (I _{mpp}) ⁷	7.99 A	8.06 A	8.13 A	8.20 A	8,27A
Off-load voltage (V _{oc}) ⁷	37.35 V	37.56 V	37.77 V	37.98 V	38,19V
Short-circuit current (I _{sc}) ⁷	8.53 A	8.56 A	8.59 A	8.62 A	8,65A
Temperature coefficient (P _{mpp})	-0.47 %/°C	-0.47 %/°C	-0.47 %/°C	-0.47 %/°C	-0,47%/°C
Temperature coefficient (V _{oc}), absolute	-0.129 V/°C	-0.129 V/°C	-0.130 V/°C	-0.131 V/°C	-0,131V/°C
Temperature coefficient (V _{oc}), in per cent	-0.34 %/°C	-0.34 %/°C	-0.34 %/°C	-0.34 %/°C	-0,34%/°C
Temperature coefficient (I _{sc}), absolute	4.4 mA/°C	4.5 mA/°C	4.5 mA/°C	4.5 mA/°C	4,5mA/°C
Temperature coefficient (I _{sc}), in per cent	0.05 %/°C	0.05 %/°C	0.05 %/°C	0.05 %/°C	0,05%/°C
Electrical rating at 800 W/m², NOCT and AM 1.5					
Power (P _{mpp})	172.50 Wp	176.25 Wp	180 Wp	183.80 W	187.5 W
Off-load voltage (V _{oc})	34.12 V	34,31 V	34.50 V	34.70 V	34.89 V
Short-circuit current (I _{sc})	7.18 A	7.21 A	7.23 A	7.26 A	7.28 A
Voltage (V _{mpp})	26.08 V	26.42 V	26.75 V	27.06 V	27.37 V
Current (I _{mpp})	6.61 A	6.67 A	6.73 A	6.79 A	6.85 A

¹ Dimensional tolerance: ±3 mm
² Nominal operating temperature of the cell at 800 W/m² irradiation, 20 °C ambient temperature, wind speed of 1 m/s
³ In accordance with IEC 61215 Ed. 2
⁴ Weight tolerance: ±0.5 kg
⁵ According to Conergy AG's current warranty conditions
⁶ Standard Test Conditions defined as follows: 1,000 W/m² radiant power at a spectral density of AM 1.5 and a cell temperature of 25 °C
⁷ Measuring tolerance STC: +/-3% (P_{mpp})

This data sheet complies with the specifications of DIN EN 50380.

Available at: